

## INSTALLATION GUIDE

5-hole deck mount tub filler r+s

BRUSHED NICKEL(BN)



CHROME(CH)



CHROME+BLACK(CHB)







## **OPERATING SPECIFICATIONS**

5-hole deck mount tub filler r+s



#### **FEATURES**

Tub Filler with Two Controls Hand Shower with Separate Control

#### **OPERATING PRESSURE**

Minimum: 15 psi Maximum: 75 psi Above 90psi it may be necessary to install a pressure reducer

#### **OPERATING TEMPERATURE**

Maximum: 176°

#### **FLOW RATE**


12.0 USGPM 2.0 USGPM



F302-3|


## PRODUCT DIMENSIONS

5-hole deck mount tub filler r+s

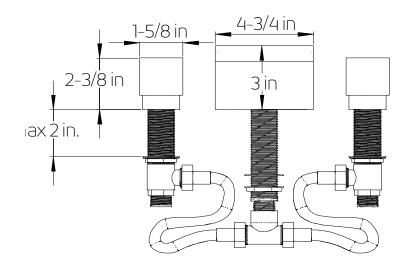





3-hole deck mount tub filler squ

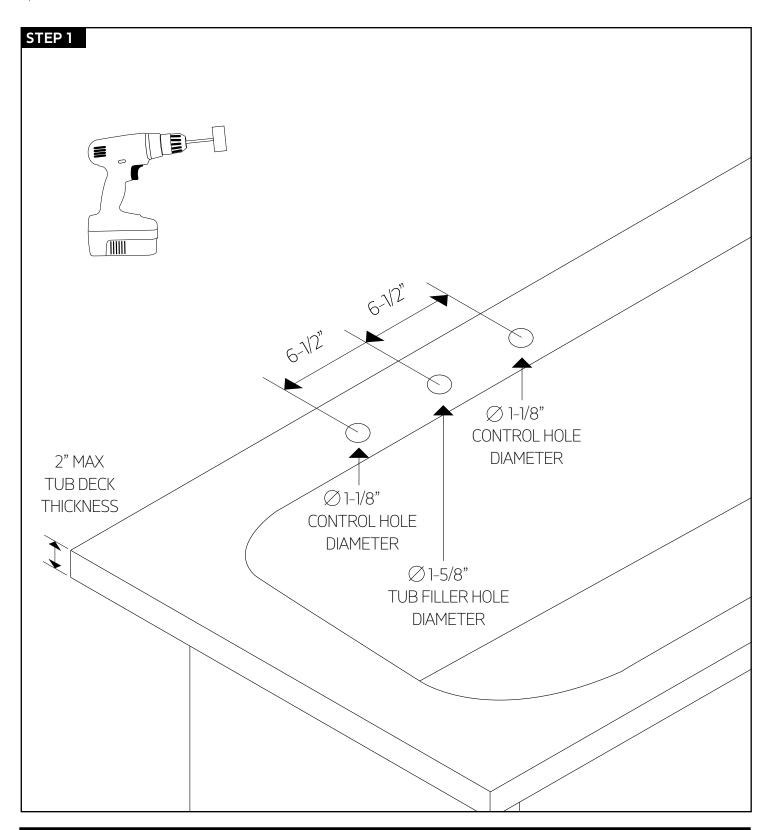

## **INSTALLATION STEPS**

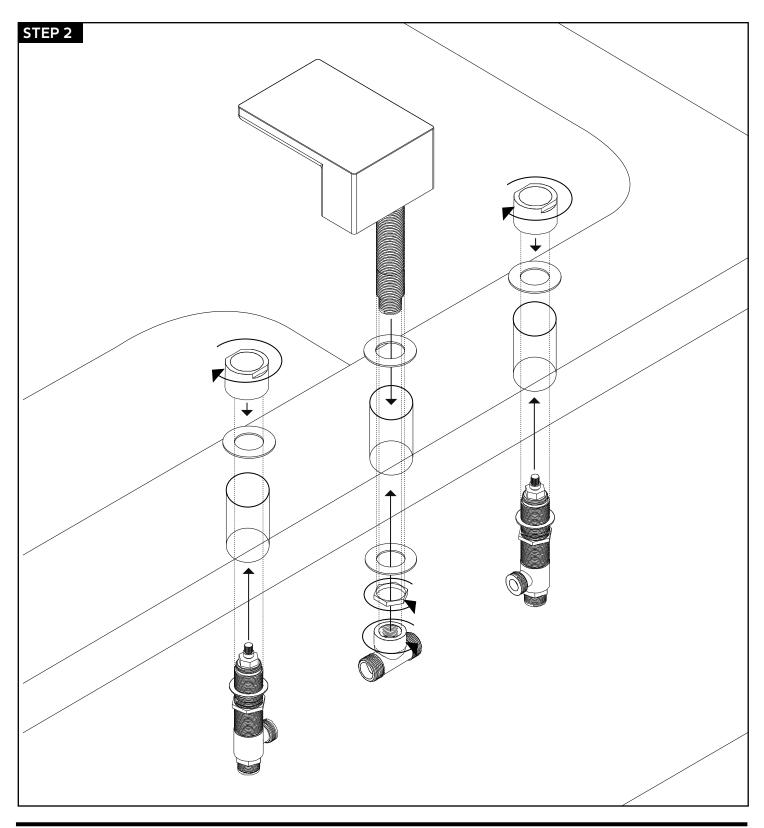


WESTOVER, INC 13305 B STREET OMAHA, NEBRASKA 68144 WWW.ARTOS.US.COM T:877.927.8679

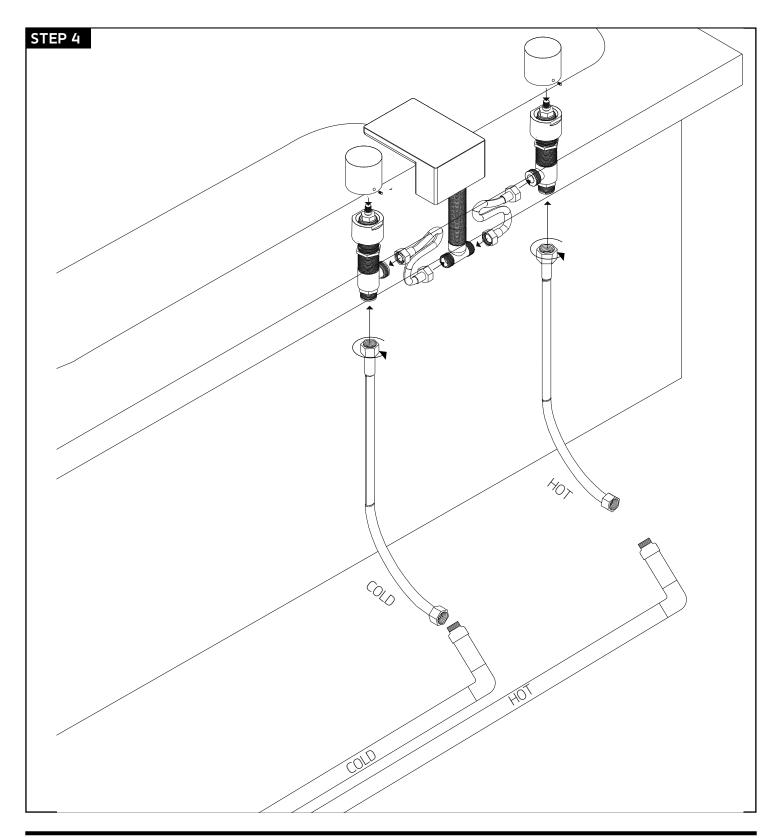

WESTOVER, INC

F302-3|

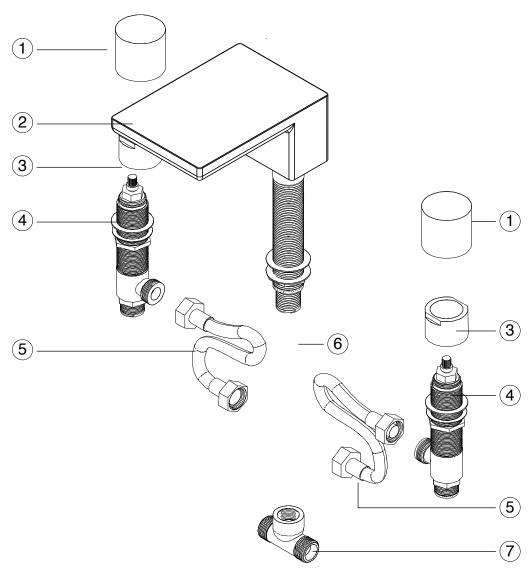

- (1) CONTROL HANDLE F302-3 XP1
- **2 TUB FILLER** F302-3 XP2
- 3 TUB FILLER CONTROL DRESS RING F302-3 XP3
- (4) TUB FILLER VALVE F302-3 XP4
- (5) **SUPPLY HOSE** F302-3 XP5
- (6) SPOUT CONNECTOR F302-3 XP6
- (7) SPOUT SUPPLY CONNECTOR F302-3 XP7



### CARE & MAINTENANCE

5-hole deck mount tub filler r+s

For best results, keep the following in mind to retain the high quality finish of your  $artos^{\circ}$  faucets:

- •Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

### LIMITED LIFETIME WARRANTY

 $\exists \Gamma \Box O S^{\circ}$  faucets are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at WWW.ARTOS.US.COM

ITEM NO. **F302-3** SERIAL NO.