

Features

- *Tub filler maximum flow rate: 15 gpm (56.8 L/min) at 60 psi*
- *Handshower flow rate: 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8 L/min)*
- *Handshower bracket may be placed on COLD or HOT side of body*
- *1/4 turn ceramic disc cartridges*
- *All brass construction*
- *Over 30 finishes including 15 PVD finishes*

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) / DOE (2.0 gpm & 1.8 gpm)
- Commonwealth of MA
- ADA compliant (with lever handles)
- EPA WaterSense handshower (2.0 gpm)
- Local codes may require installation of an upstream tempering valve



1408-48.FR SHOWN

1408-XX.13M.20


1408-XX.13M-18

1408-XX.20

1408-XX.18



XX= DENOTES
HANDLE SERIES

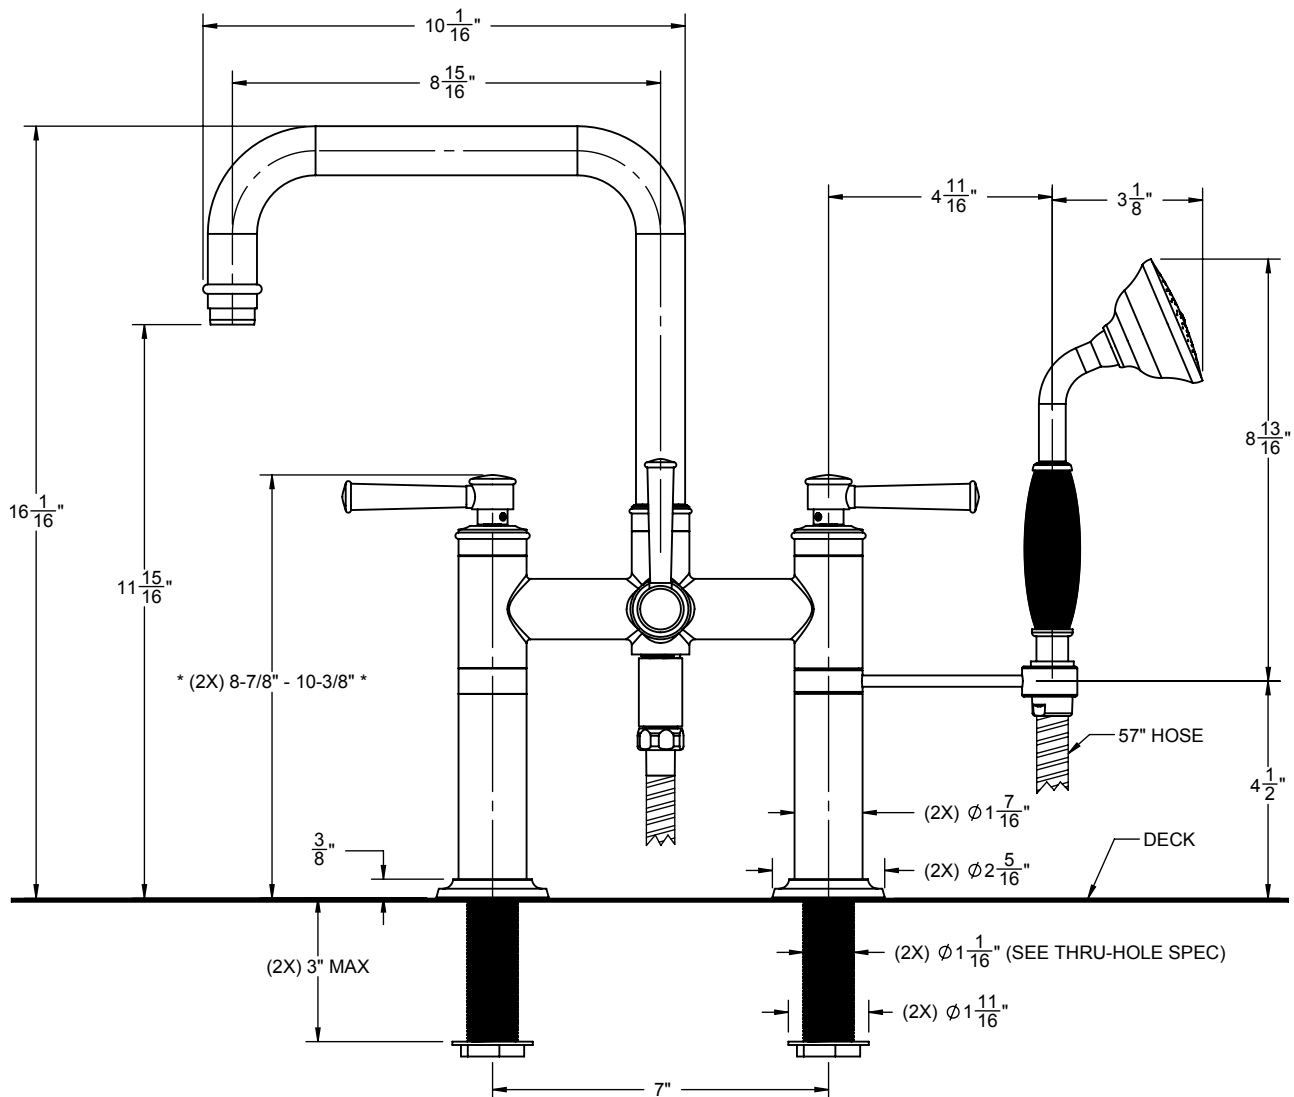

THROUGH-HOLE SPECIFICATIONS

<u>MIN</u>	<u>RECOMENDED</u>	<u>MAX</u>
Ø 1-1/16"	Ø 1-5/16"	Ø 1-3/8"

* = DIMENSION VARIES BASED ON HANDLE SERIES
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"