# MECHANICAL FAUCETS 752-VOCCP

## **Tub and Shower Fittings**



#### **Product Type**

Wall Mounted Two Handle Exposed Two Handle Service Fitting Only

#### **Features & Specifications**

- Two Handle
- 3" Cross Handles
- Slow Compression Operating Cartridges
- 1/2" NPT Female Thread Union Inlets
- Less Shower Riser and Shower Head

#### **Performance Specification**

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

#### Warranty

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

#### **Codes & Standards**

• ASME A112.18.1/CSA B125.1

| Job Name               |                               |
|------------------------|-------------------------------|
| Item Number            |                               |
| Section/Tag            |                               |
| Model Specified        |                               |
| Architect              |                               |
| Engineer               |                               |
| Contractor             |                               |
| [ ] Submitted as Shown | [ ] Submitted with Variations |
| Date                   |                               |






### **752-VOCCP**

## **Tub and Shower Fittings**



#### **Architect/Engineer Specification**

Chicago Faucets No. 752-VOCCP, Exposed Two-Handle Service Fitting, wall-mounted, chrome plated. 3" metal cross handles with eight-point, tapered broach and secured blue and red index buttons. Slow compression rebuildable cartridge, opens and closes 360° for fine adjustment, closes with water pressure, features square, tapered stem. 1/2" NPT female thread union inlets. Less Shower Riser and Shower Head.

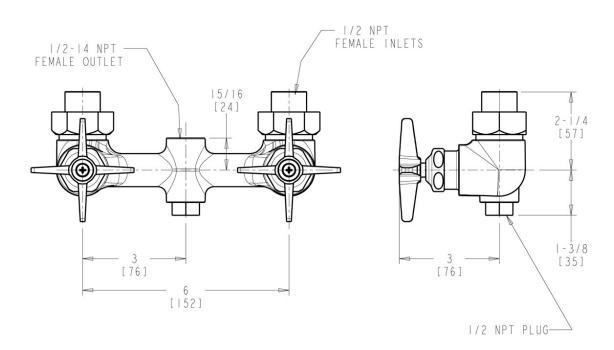

#### **Operation and Maintenance**

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at <a href="https://www.chicagofaucets.com">www.chicagofaucets.com</a>.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.

