

# Carra Pendant

6531503 1.0

## GENERATION LIGHTING PENDANT


### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

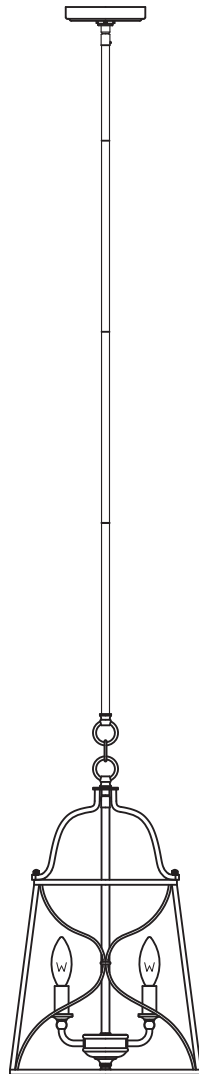

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


## GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


[www.generationlighting.com](http://www.generationlighting.com)

© 2019 Generation Lighting. All rights reserved.  
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

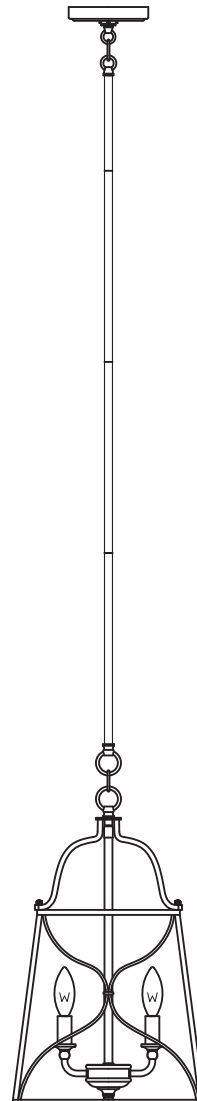

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

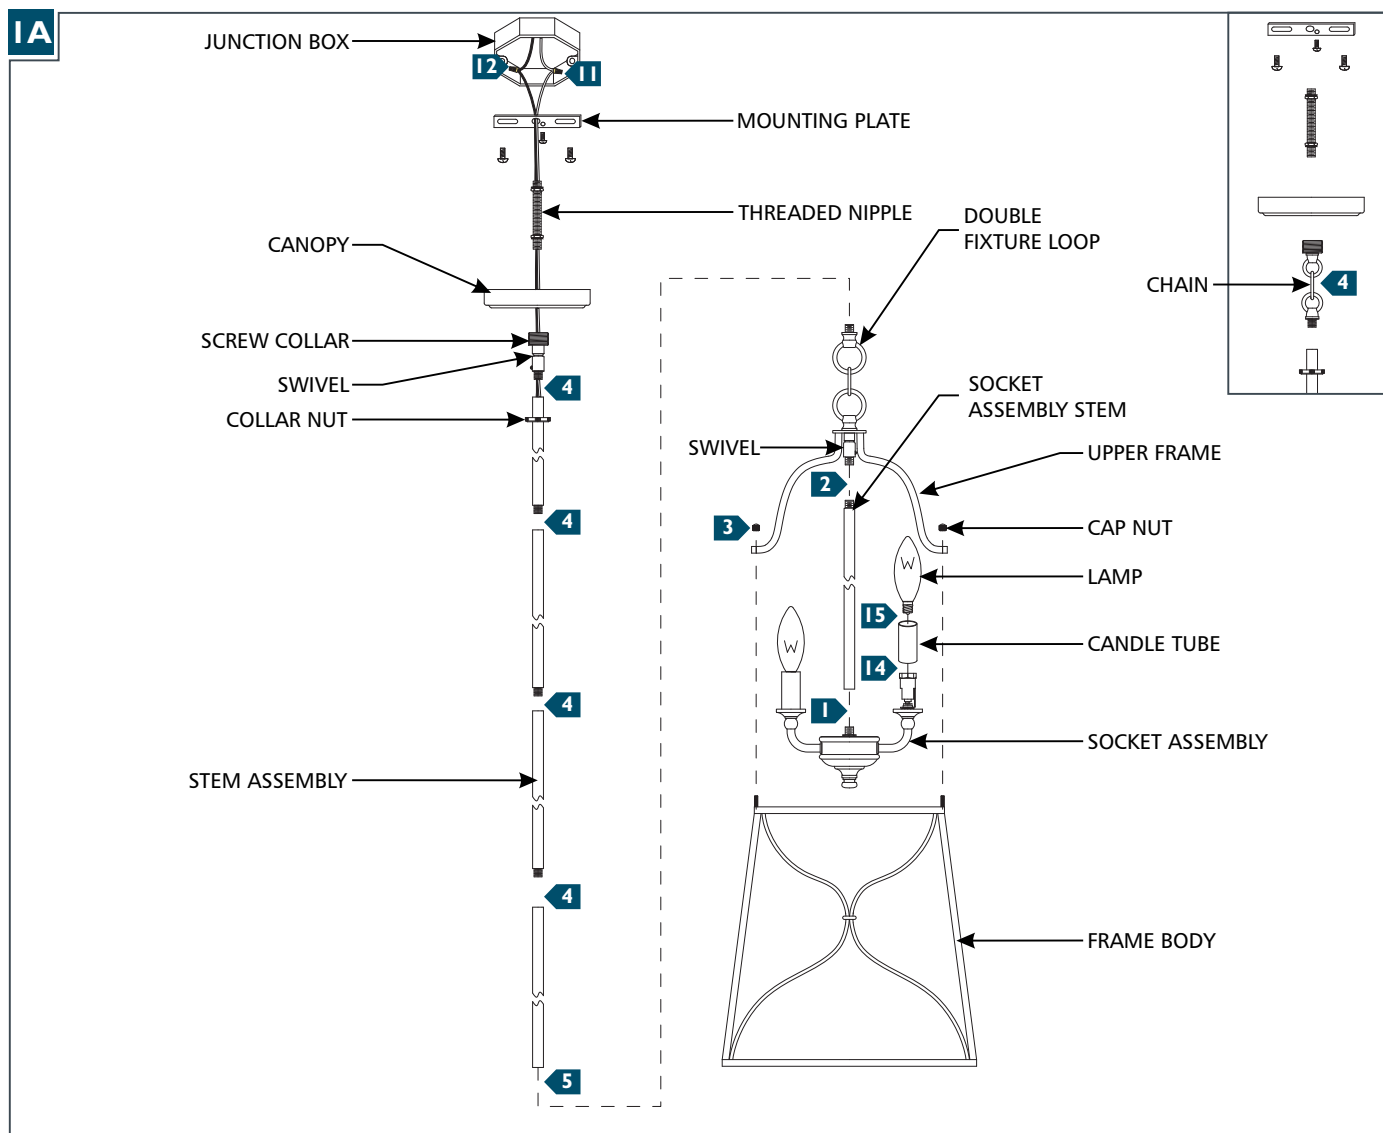

- 1** Feed the fixture wires through the socket assembly stem, then screw it onto the socket assembly.
- 2** Feed the fixture wires through the swivel and double fixture loop on the upper frame, then screw the swivel onto the socket assembly stem.
- 3** Install the upper frame to the frame body and secure them together using the cap nuts.
- 4** Determine the wanted height or look of the fixture with the provided swivel, chain, and stems, then assemble them by screwing them together. All part may be used alone or used in combination.
- 5** Feed the fixture wires through the stem/chain assembly, then screw the stem assembly onto the double fixture loop.
- 6** If necessary, screw the threaded nipple tightly onto the mounting plate.
- 7** Install the collar nut and canopy onto the stem assembly.
- 8** Feed the fixture wires through the mounting plate/nipple assembly and screw the screw collar onto the threaded nipple.
- 9** Align and secure the mounting plate to the junction box.
- 10** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 11** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 14** Install the candle tubes by sliding them over the sockets.
- 15** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.