
UL SPECIFICATION * FIXTURE SHALL BE LISTED FOR LOCATION ONLY AND LABELED AS SUCH. * FIXTURE MUST BE MANUFACTURED IN ACCORDANCE WITH UL STANDARD 1598.

PARTS SPECIFICATIONS ITEM QTY DESCRIPTION

- SOCKET- UL LISTED/CSA CERTIFIED (1) BASE=MEDIUM SOCKET=PORCELIN SEE LEAD WIRE FOR SOCKET WIRE SPEC.
- LEAD WIRE- 120" В (1) FROM FRAME TOP UL LISTED/CSA CERTIFIED, AWG #18 105°C BLACK AND WHITE WIRE. STRIP 1/2 [12.7], SPLIT 3 [76.2]. FROM TOP OF SCROLL.

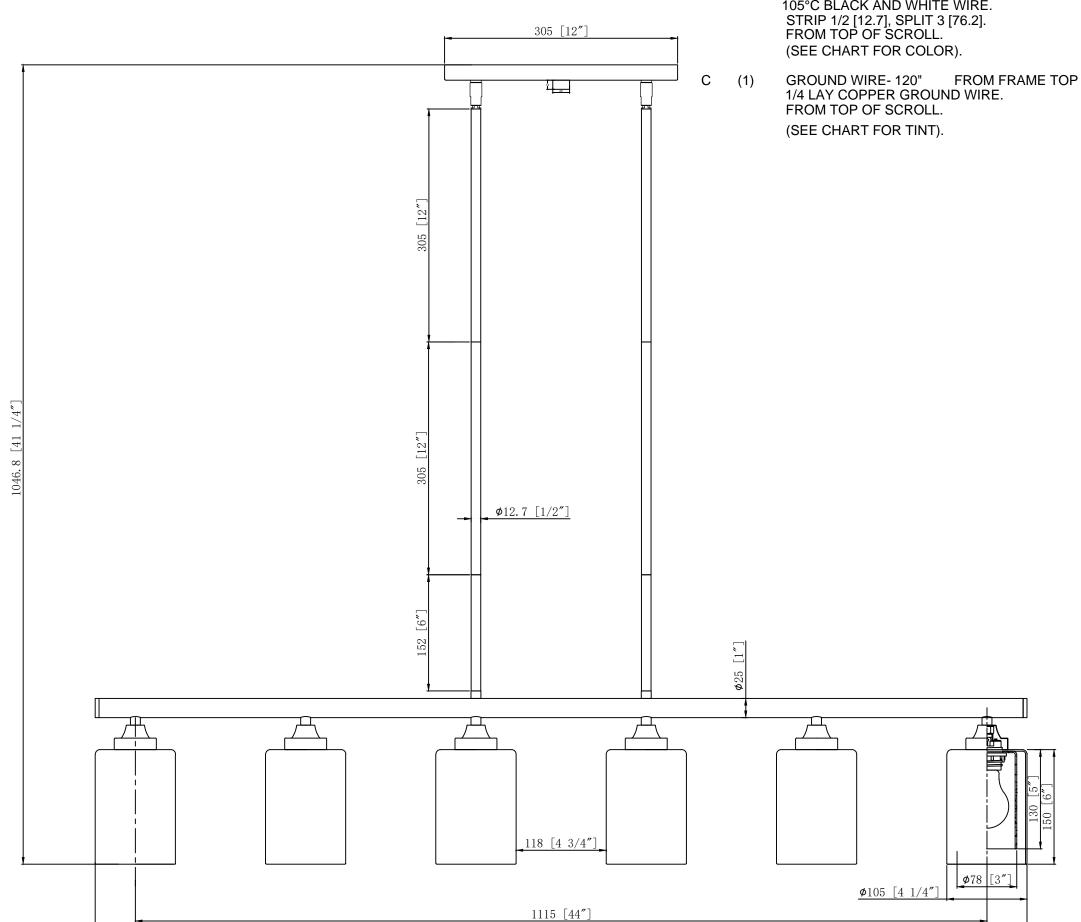

1220 [48"]

INNOVATIONS LIGHTING DESIGN COPYRIGHT - 28/09/2020 ALL RIGHTS RESERVED AND MAY NOT BE DUPLICATED WITHOUT OUR WRITTEN PERMISSION

		"mm" DIMENSION INDICATED IN []							
	DRAWN IN	DIMENSION IN [] IS FOR REF. ONLY						TITL	
	THIRD ANGLE	TOLLINANOLS (LACEFT AS NOTED)						(
	PROJECTION	DECIMAL	ANGULAR	FRACTIO	NAL	S	CALE		
		NONE ±.031	± 1/2°	± 1/32		1:7		PAR	
		.X ±.015 .XX ±.010	DATE	DRAWN BY	CHECKED BY APPROVE		APPROVED BY		
	Τ .	.XXX ±.010	28/09/2020		١,	X	X	ITEN	

PART NO. DESCRIPTION REQ.

INNOVATIONS CREATIVITY MEETS EVOLUTIONARY DESIGNO

6LT PENDANT

REV. RT NO. PENDANT REV.A M NO. DL190307-6TR