

## Underscore<sup>®</sup> Oval

60" x 36" Heated BubbleMassage<sup>™</sup> air bath with Bask<sup>®</sup> K-5714-GHW

#### Features

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Bask<sup>®</sup> heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Built-in heater.
- Automatic and manual purge cycles remove residual water from air channels after use.
- 60-minute automatic shutoff timer.
- Slotted overflow allows for deep soaking.
- Oval-shaped basin offers a graceful and spacious bathing experience.
- Wide ledge on one side is ideal for deck-mount faucet and/or handshower.
- Integral lumbar support.
- Keypad control.
- Textured bottom surface.
- Bask<sup>®</sup> heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.

#### Material

Acrylic.

#### Technology

• Heated BubbleMassage<sup>™</sup> technology warms and humidifies air before it enters the bath.

#### Installation

- Drop-in or undermount.
- Center drain.
- 120V electrical requirement allows for easy installation with standard outlet.
- Requires two dedicated circuits.

#### **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

#### **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-1703 Whirlpool Remote Control K-531 Under-Mount Installation Kit K-9498 3" Keypad Trim K-24916 Wireless Music Kit K-1705 Whirlpool/BubbleMassage™ Remote Control K-702200-G54 Frameless Sliding Bath Door K-702200-G73 Frameless Sliding Bath Door

# • • • •

#### **Codes/Standards**

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2

#### KOHLER<sup>®</sup> Hydrotherapy Components Five-Year Limited Warranty KOHLER<sup>®</sup> Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	lce™ Grey
	58	Thunder™ Grey
	_	

7 Black Black™






### **Underscore® Oval**

60" x 36" Heated BubbleMassage™ air bath with Bask®

#### K-5714-GHW

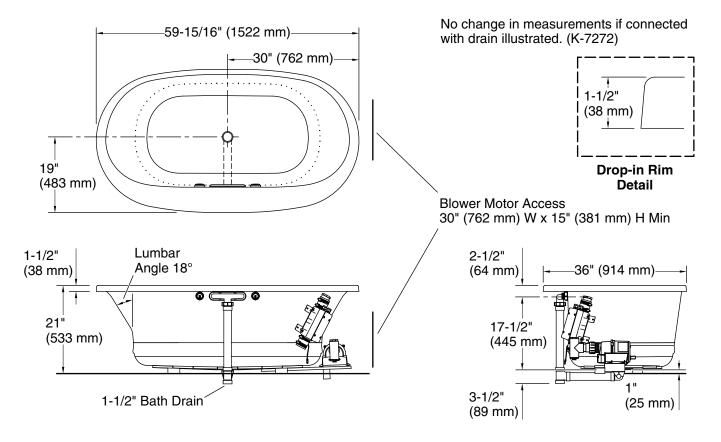

#### **Required Electrical Service**

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

 Blower, Heated
 120 V, 15 A, 60 Hz

 Surface:
 120 V, 15 A, 60 Hz

 Air bath:
 120 V, 15 A, 60 Hz

#### **Technical Information**

All product dimensions are nominal.			
Installation:	Drop-in, Undermount		
Drain location:	Center		
Basin area, bottom:	43" x 25-5/8" (1093 mm x 651 mm)		
Basin area, top:	55-9/16" x 28-3/8" (1411 mm x 720 mm)		
Weight:	116 lbs (52.6 kg)		
Minimum floor load:	51 lbs/ft² (249 kg/m²)		
Water depth:	16-5/16" (415 mm)		
Water capacity:	72.017 gal (272.6 L)		
Template:	Drop-in, 1268438-7, required, included		
Electrical component rating:	Blower: 120 V, 10 A, 60 Hz Heated Surface: 120 V, 0.5 A, 60 Hz, 65		

#### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

