

# Parallel<sup>™</sup> Rite-Temp<sup>™</sup> bath and shower trim kit, 1.75 gpm K-TS23502-4G

#### Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- 6-1/4" (159 mm) diverter bath spout with slip-fit connection
- 1.75 gpm (6.6 lpm) showerhead with Katalyst<sup>™</sup> air-induction technology
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup
- Coordinates with other products in the Parallel collection

#### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

#### Technology

 Katalyst<sup>™</sup> air-induction technology infuses water with air, creating bigger drops for a more powerful spray

#### Installation

Trim only; requires valve to complete installation (sold separately)

### **Included Components**

Additional Components: Shower arm and flange









Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense™ California Energy Commission (CEC)

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.


# Color Code Description

CP	Polished Chrome
BN	Vibrant <sup>™</sup> Brushed Nickel
BL	Matte Black
2MB	Vibrant <sup>™</sup> Brushed Moderne Brass



# **KOHLER**, Faucets

# Parallel<sup>™</sup> Rite-Temp<sup>™</sup> bath and shower trim kit, 1.75 gpm K-TS23502-4G

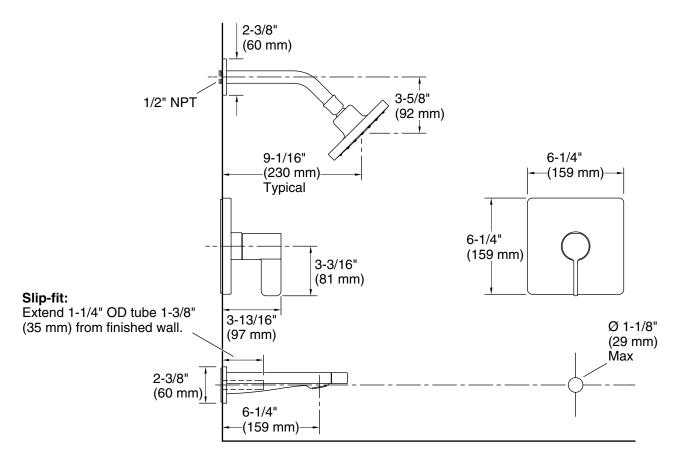

## **Technical Information**

All product dimensions are nominal. No

# Drain included:

Spout:

Spout reach: 6-1/4" (158 mm)

### Showerhead/Body Spray:

Rated maximum 1.75 gal/min (6.6 l/min) flow: Pressure: 45 psi (3.1 bar)

#### Notes

Install this product according to the installation instructions.

