

4197-3195 WAVERLY™



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

FEATURES

- Uses 20% less water than conventional toilets
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Elongated front, SmartHeight™ bowl
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Complies with ADA requirements for accessibility
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 72 metal trip lever with color match ceramic insert
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White



MODEL 4197-3195

Toilet seat not included

Available as CTK



ELONGATED



SMARTHEIGHT ADA



CTK

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
4197-3195	Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply.	
4197	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat and supply.	
3195	Tank and cover only. Includes tank trim and left hand, metal trip lever with color match ceramic insert. Less supply.	

TANK TRIM & REPLACEMENT PARTS





72	Trip lever - metal trip lever with color match ceramic insert, left hand
2206	Pilot operated fill valve
630-0207	Replacement flapper
3195-LID	Tank lid

4197-3195 WAVERLY™



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4197-3195	Elongated front, SmartHeight™ (1.28 gpf/4.8 lpf) two-piece toilet	   

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' MagnaFlush™ flushing technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	6-3/4' X 9-5/8'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 4197- 53 lbs. (24 kg) Model 3195- 32 lbs. (15 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

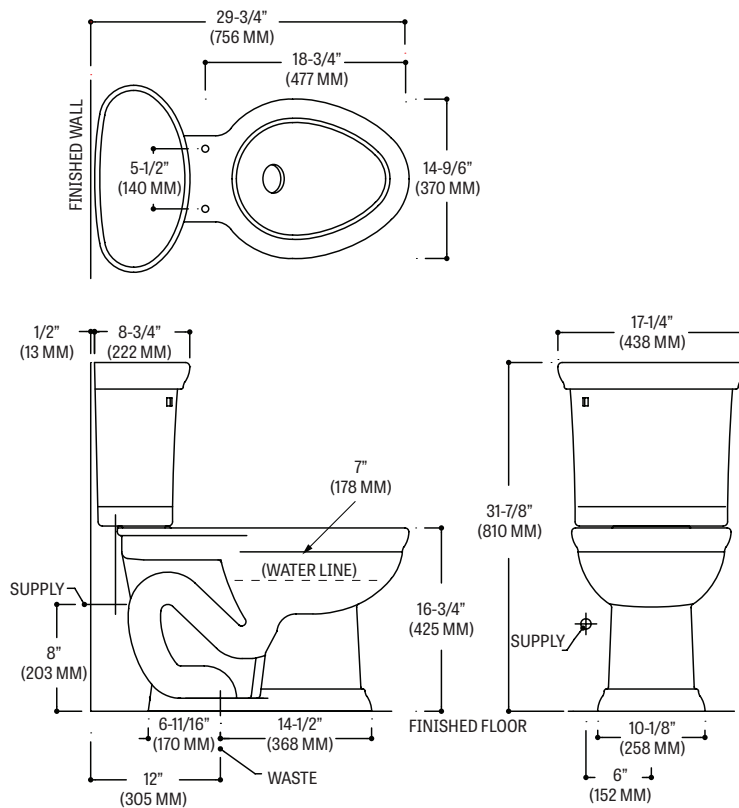

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.