

4977-2916 DENALI® 1.28

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

FEATURES

- High performance MagnaFlush™ flushing technology
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- PuraClean® easy-to-clean glaze
- Elongated front, SmartHeight™ bowl
- Pilot anti-siphon fill valve
- 3" rigid flapper flush valve
- 12" rough-in
- SmartFasten™ 2-bolt tank-to-bowl connection
- Model 77 decorative metal trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim
- Available in White



MODEL 4977-2916

Toilet seat not included

Available as CTK



ELONGATED







SMARTHEIGHT ADA



CTK

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
4977-2916	Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply.	   
4977	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat and supply.	
2916	Tank and cover only, with left hand, side-mount, chrome-plated, metal trip lever. Less supply.	

TANK TRIM & REPLACEMENT PARTS

77	Trip lever - side-mount, chrome-plated, metal trip lever
2206	Pilot operated fill valve
2916-1112	Denali® 1.28 rigid flapper flush valve
630-0030	Replacement flush valve seal
3916-LID	Tank lid







4977-2916 DENALI® 1.28



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4977-2916	Elongated front, SmartHeight™ (1.28 gpf / 4.8 lpf) two-piece toilet	   

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ Flushing Technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	6-1/2' X 9-3/4'
ROUGH-IN	12'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2'
SHIPPING WEIGHT	Model 4977- 57 lbs. (26 kg) Model 2916- 34 lbs. (15 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five-Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

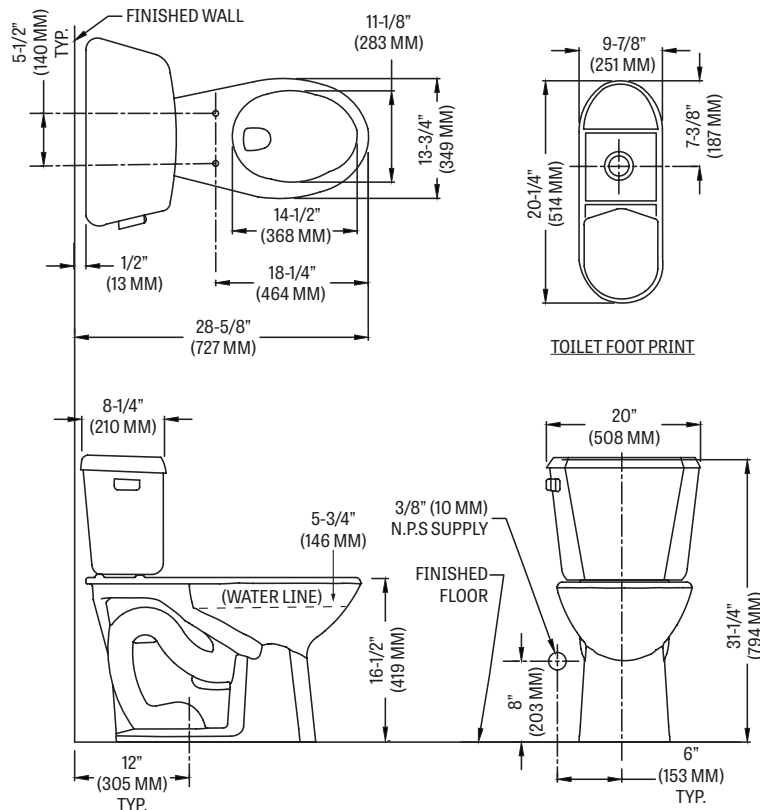

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

