

INSTALLATION INSTRUCTIONS

For Item#8567 (Rev. 05/08/2012)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the circuit breaker and remove old fixture including mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to misplace any small part necessary for installation.
3. Pull black, white and ground wires out of the center hole of the bottom plate.
4. Next, connect electrical wires while supporting the bottom assembly. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the wiring box through the center hole of the bottom plate. Align four mounting holes on the bottom assembly to the four stud screws on the bottom plate (if necessary, wall plugs may be used first) and secure with four knurled knobs (Fig.1 &2)
5. Loosen the Finial and remove the Top Cap Install the Glasses into the Fixture Body,
6. At this point, you may install B 10.5 4*60W bulbs (not included) in accordance with fixture specifications. **(DO NOT EXCEED MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)** For installing bulbs or replacing bulbs at a later date, remove finial and Top Cap. After the installation, replace the Top Cap and tighten with Finial. (Fig. 1)

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


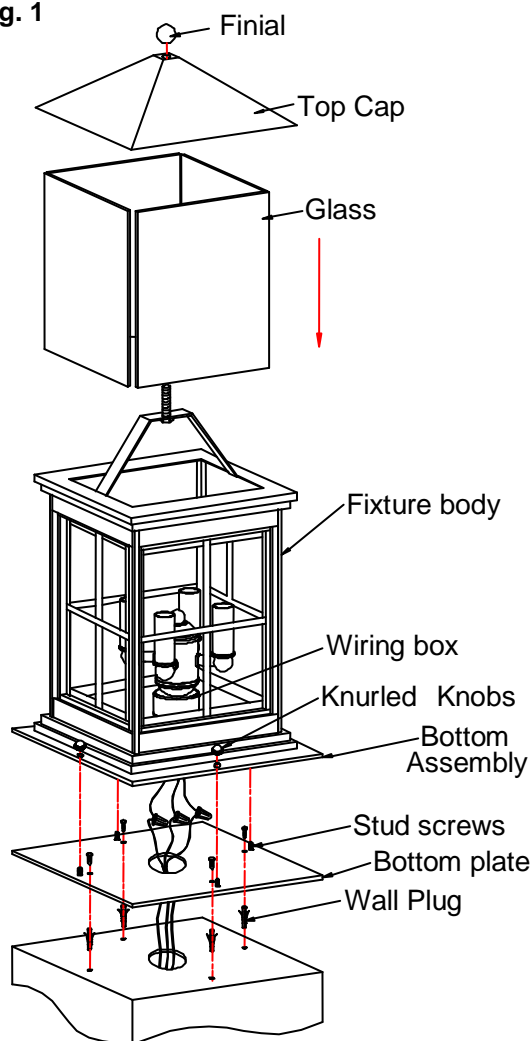


Fig. 2

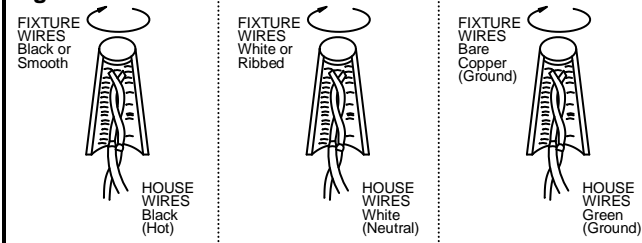

“U.S.Patent; D429,018

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.”

© 1998 Minka Lighting, Inc.

