

CRYST@RAMA



LIGHTING THE WAY FOR SIXTY YEARS


ASSEMBLY INSTRUCTION MODEL #5012OSCLMWP

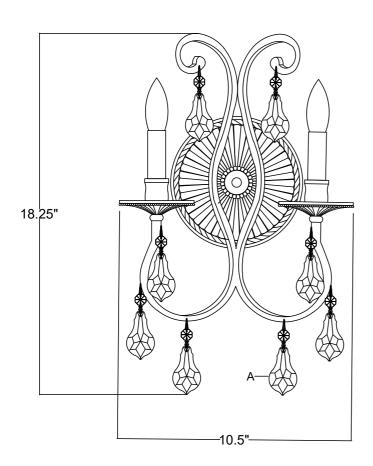





All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate



You will need 2-Candelabra Base Bulb 40 Watts recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

The fixture is Dry rated

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

- Install the mounting plate onto the outlet box and secure with the mounting screws.
- 2. Place the backplate over the mounting plate and secure with the thread and finial.
- 3. Place the candle sleeve and bobeche over the socket.
- 4. Dress the crystals as illustrated.

Crystal Sets

A. 8 Sets. (1)14mm + (1)63mm

WARNING:This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm.For more information go to www.p65warnings.ca.gov





LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #5012OSCLMWP

Part Number

Part Numbers

- A. (2)-Wire Connector
- B. (1)-Mounting Plate
- C. (2)-Mounting Screw
- D. (1)-Thread
- E. (1)-Nut
- F. (1)-Backplate ; W5 3/4",H1 1/4"-XSN5011OSBKP5.75IN
- G. (1)-Arm kit
- H. (1)-Finial
- I. (2)-Metal candle sleeve; H2.17"-XSN5011OSMCDL2IN
- J. (2)-White plastic candle sleeve -XSN5011OSPCDL2IN
- K. (2)-Holder
- L. (2)-Bobeche; Ø3 1/8"-XSN5011OSBOB3IN
- M.(8)-Eyelet-XSU5011OSEYE

