



# CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #4460-CH-CL-MWP

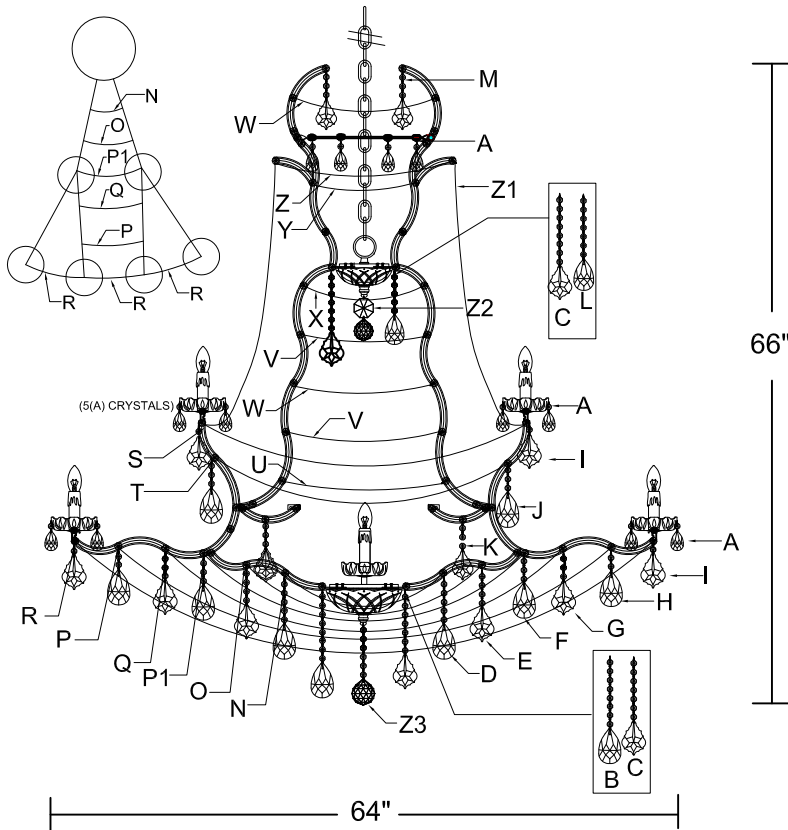

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 37-Candelabra Base Bulb  
25 Watts Recommended 25 Watts Max  
USE LED BULBS FOR EXTENDED USE

### How to Install

1. Do a complete inventory of all parts and components before you start installing.
2. Attach each of the arms to the metal plates, using enclosed screws.
3. Use the wire connector to connect the main wire, lead wire and socket wires.
4. Using the bottom thread, apply the metal dish, nut, glass dish and small metal dish in that order. Secure all by tightening with the finial.
5. Screw the small joiner arms (AA) and reinforcing ring (BB) on the frame (Z).
6. After safely attaching fixture into outlet box, install bobeches, bulbs (not included) and proceed to connecting the power.
7. When you begin to dress the fixture, start with packet labeled (A).
8. IMPORTANT: Apply crystal sets in alphabetical order.

### DETAILED ILLUSTRATION

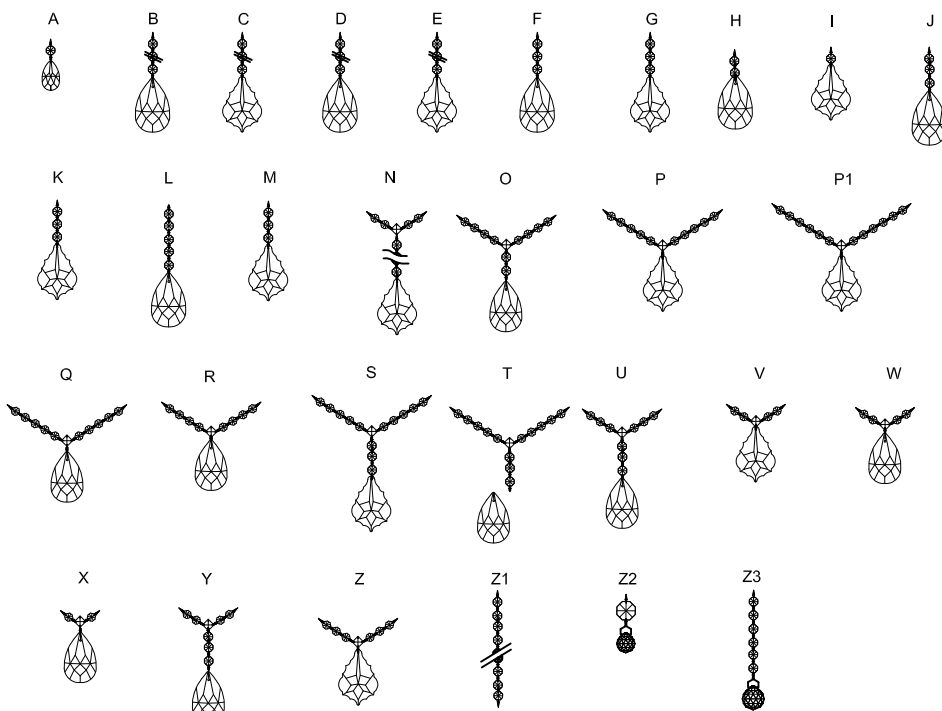

### Crystal Sets

- A. 192Sets (1)14mm + AS9-2"
- B. 6Sets (8)14mm + AS9-3"
- C. 12Sets (7)14mm + AS20-3"
- D. 12Sets (5)14mm + AS9-3.5"
- E. 12Sets (4)14mm + AS20-3.5"
- F. 12Sets (3)14mm + AS9-3"
- G. 24Sets (3)14mm + AS20-3.5"
- H. 24Sets (2)14mm + AS9-3.5"
- I. 36Sets (1)14mm + AS20-3.5"
- J. 12Sets (3)14mm + AS9-3"
- K. 12Sets (3)14mm + AS20-3"
- L. 6Sets (5)14mm + AS9-2.5"
- M. 12Sets (3)14mm + AS20-2"
- N. 12Sets (9)14mm + (1)16mm Square + AS20-3.5"
- O. 12Sets (10)14mm + (1)16mm Square + AS9-3.5"
- P. 12Sets (10)14mm + (1)16mm Square + AS20-3.5"
- P1. 12Sets (12)14mm + (1)16mm Square + AS20-3.5"
- Q. 12Sets (10)14mm + (1)16mm Square + AS9-3.5"
- R. 24Sets (8)14mm + (1)16mm Square + AS9-3.5"
- S. 12Sets (13)14mm + (1)16mm Square + AS20-3"
- T. 12Sets (13)14mm + (1)16mm Square + AS9-3"
- U. 12Sets (9)14mm + (1)16mm Square + AS9-3"
- V. 24Sets (4)14mm + (1)16mm Square + AS20-3"
- W. 24Sets (4)14mm + (1)16mm Square + AS9-3"
- X. 12Sets (2)14mm + (1)16mm Square + AS9-3"
- Y. 12Sets (7)14mm + (1)16mm Square + AS9-3"
- Z. 12Sets (6)14mm + (1)16mm Square + AS20-3.5"
- Z1. 12Sets (34)14mm
- Z2. 1Piece (1)50mm + AS8-50mm Ball
- Z3. 1Piece (6)14mm + AS8-60mm Ball

**WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

# CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #4460-CH-CL-MWP

## Part Number

### Part Numbers


- A. (14)-Wire Connector
- B. (1)-Mounting Plate
- C. (1)-Canopy; W6"x1.6" (XFB4418CHCAN6IN)
- D. (1)-Collar Ring
- E. (1)-Collar Loop
- F. (1)Chain; 72", 6mm (XFB4424CHCHA6MM)
- G. (1)-Steel Wire
- H. (1)-Ground Wire
- I. (1)-Loop
- J. (2)-Washer
- K. (1)-Nut
- L. (1)-Metal Cover
- M. (36)-Screws
- N. (1)-Metal Plates
- O. (1)-Thread
- P. (1)-Metal Dish
- Q. (2)-Nut
- R. (1)-Dish; Ø6", 11mm hole (XFB4439DIBOB6IN)
- S. (2)-Small Metal Dish
- T. (2)-Finial (XFB4418CHFIN)
- U. (1)-Metal Cover
- V. (1)-Metal Plates
- W. (1)-Thread
- X. (1)-Metal Dish
- Y. (1)-Dish; Ø8", 11mm hole (XFB4460DIBOB8IN)
- Z. (12)-Frame
- AA. (12)-Small Joiner Arms
- BB. (1)-Reinforcing ring
- CC. (24)-Ball Nut (XFB4460CHBANUT)
- DD. (24)-Rosette; Ø0.75", 3.2mm hole
- EE. (24)-Washer
- FF. (1)-Center Bobeche; Ø5", 26mm hole (XFB4418BOB5IN)
- GG. (37)-Candle Sleeve; h4" (XFB4418CDL4IN)
- HH. (36)-Bobeche; Ø5", 26mm hole, 5pin (XFB4418CHBOB5IN)
- II. ( )-Rosette

PART BAG I : Includes Parts A

PART BAG II : Includes Parts B, D, E

PART BAG III: Includes Parts I, J, K, L, M, N, O, P, Q, S, T

PART BAG IV: Includes Parts U, M, V, W, X, Q, S, T

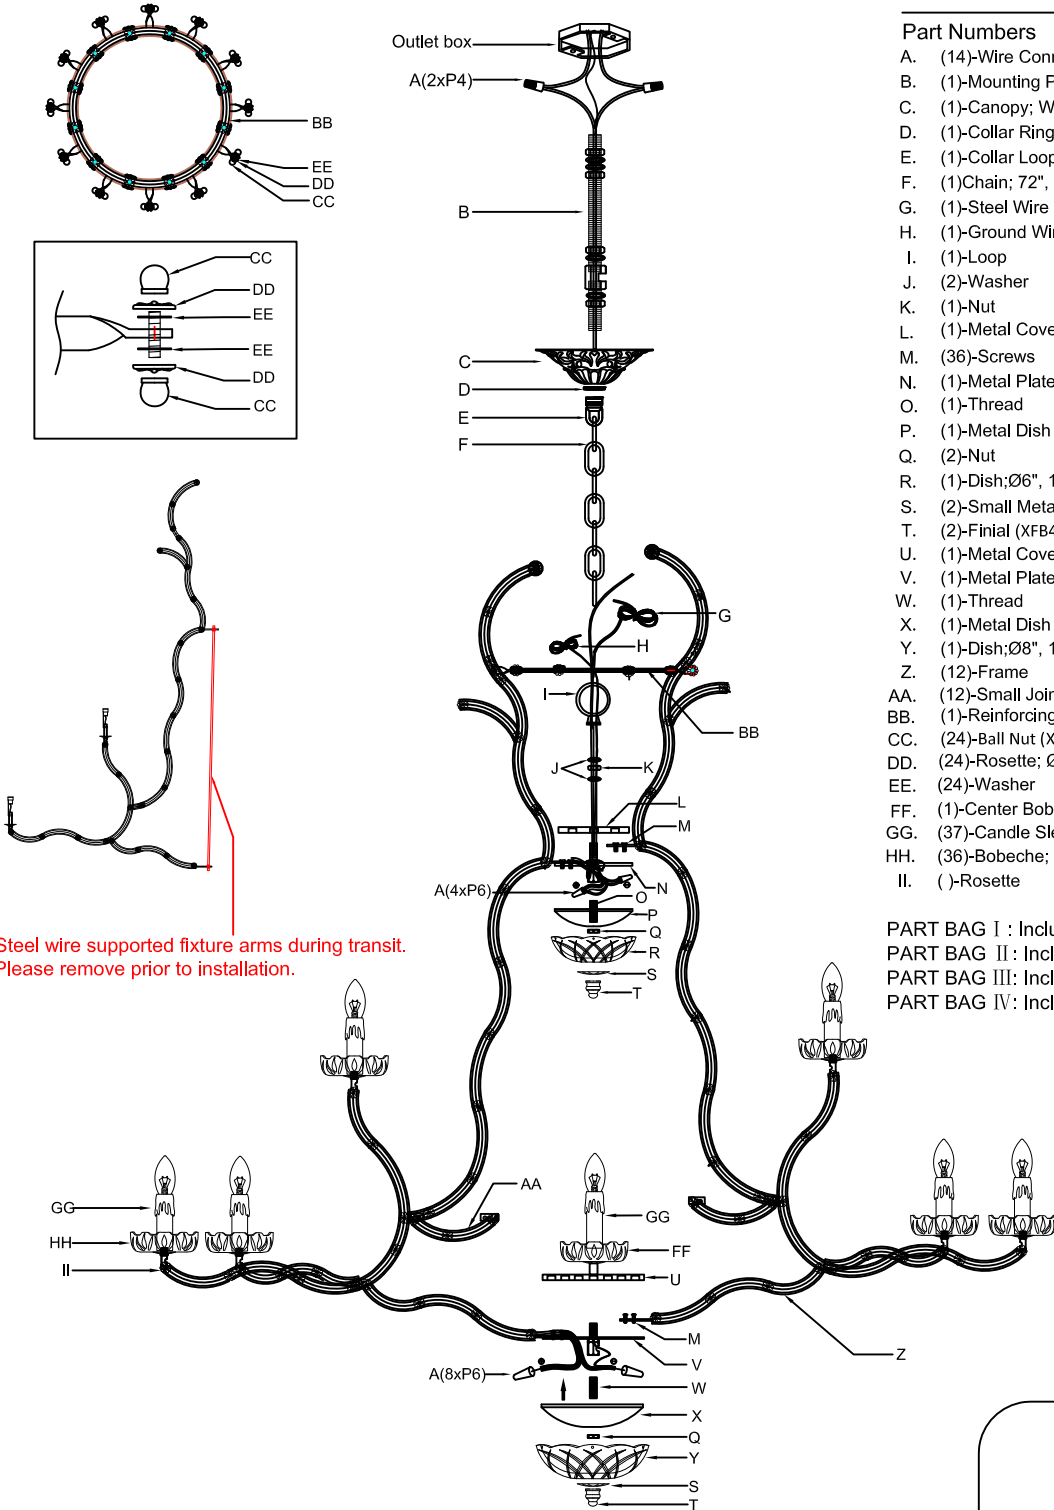

Steel wire supported fixture arms during transit.  
Please remove prior to installation.

